

AC123-01 Wireless one channel portable RC transmitter




Description

- Elegant and modern design
- Special scratch-resistant finish

Parameters

Article nr.	AC123-01
Battery type	3V CR2032
Operating temperature	-20°C~+55°C
Frequency	433.92MHz

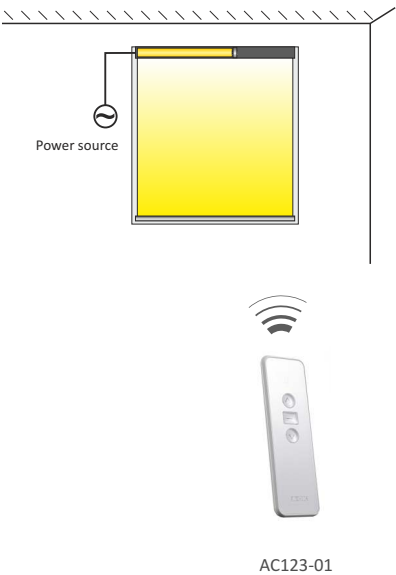

AC133-01 Wireless one channel wall RC transmitter




Description

- Elegant and modern design
- Special scratch-resistant finish
- Optional use as portable / wall transmitter

Parameters

Article nr.	AC133-01
Battery type	3V CR2032
Operating temperature	-20°C~+55°C
Frequency	433.92MHz

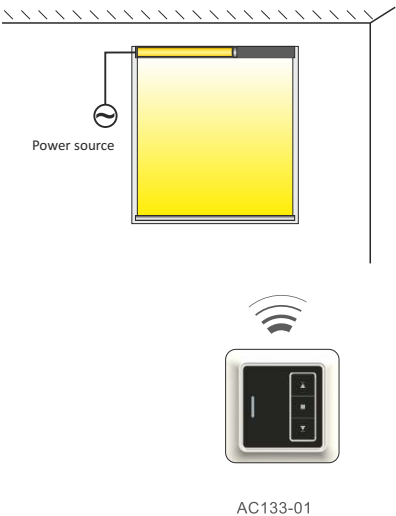

AC229-01 One channel touch wall receiver / controller




Description

- Elegant and modern design
- Compatible with any tubular motor
- Touch glass panel, scratch-resistant finish
- Water resistant design

Parameters

Article nr.	AC229-01
Voltage	120V 60Hz , 230V 50/60Hz
Operating temperature	-35°C - +65°C
Frequency	433.92MHz
Operating mode	wireless receiver / hand control

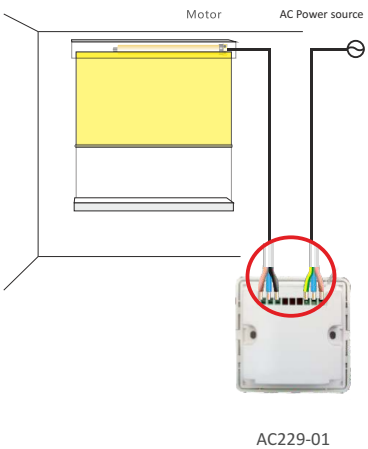

AC123-01



8-E0004 Turning manual under-plaster switch




Description

- Compatible with any tubular motor
- 3 position mechanical turning switch under-plaster

Parameters

Article nr.	8-E0004
Dimensions	80 x 80 x 48 mm
Operating temperature	-30°C - +50°C
Voltage	230V / 16A

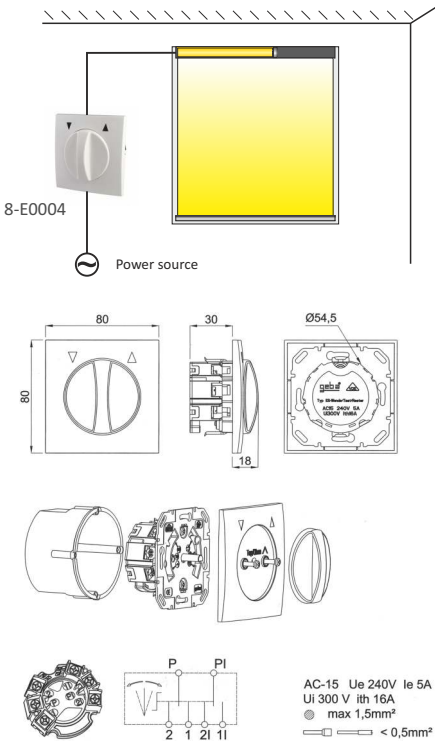

AC226-01 Water resistant external RC receiver





Description


- Full sealed, water resistant design IP65
- Non-flammable cover
- Dimensions 23x32x127 mm

Parameters

Article nr.	AC226-01
Voltage	120V 60Hz , 230V 50/60Hz
Operating temperature	-40°C - +85°C
Frequency	433.92MHz

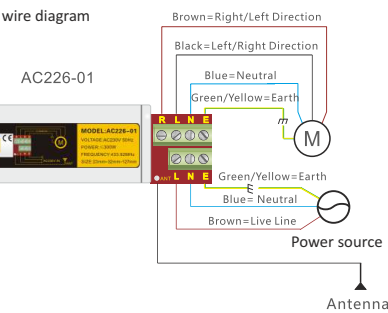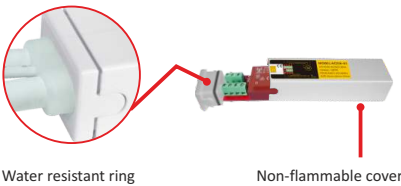

AC212 External RC receiver

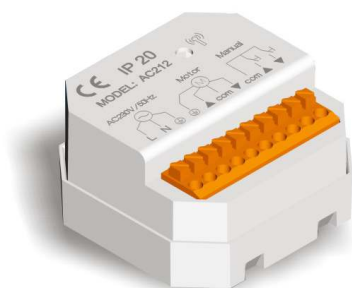


Description

- Quick and easy connection with threaded clips
- Usable for manual and remote control

Parameters

Article nr.	AC212
Voltage	230V 50/60Hz
Operating temperature	-5°C - +60°C
Frequency	433.92MHz

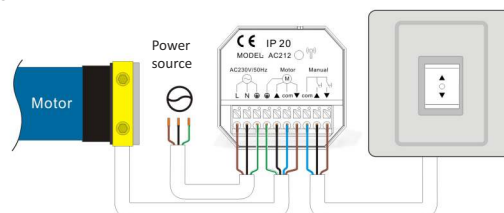

AC202-02 External RC / IR receiver, 12V Trigger




Description

- Controlling of screen with wireless RC / IR transmitter, manual switch and projector
- Non-flammable and water resistant plastic cover

Parameters

Article nr.	AC202-02
Voltage	230V 50/60Hz
Operating temperature	-5°C - +60°C
Frequency	433.92MHz

DC12V signal detection

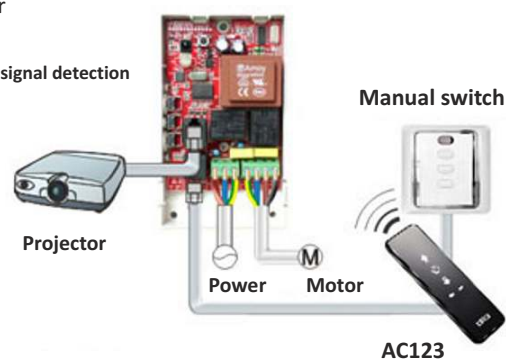

AC512 AC Trigger



Description

- Wireless transmitter function :
projector is turning ON - automatic screen unroll
projector is turning OFF - automatic screen roll-up
- Easy installation and controlling

Parameters

Article nr.	AC512-02
Voltage	230V 50/60Hz 120V 60Hz
Operating temperature	-20°C - +55°C
Frequency	433.92MHz

